


■アルミ合金 配管用継手・管 在庫表

[A5052TD-O]

径の呼び		外径 D	厚さ			
A	B		S10S 厚さ t	S20S 厚さ t	S40 厚さ t	S80 厚さ t
15	1/2	21.7		2.5	2.8	3.7
20	3/4	27.2		2.5	2.9	3.9
25	1	34.0		3.0	3.4	4.5
32	1 1/4	42.7		3.0	3.6	4.9
40	1 1/2	48.6		3.0	3.7	5.1
50	2	60.5	2.8	3.5	3.9	5.5
65	2 1/2	76.3	3.0	3.5	5.2	7.0
80	3	89.1	3.0	4.0	5.5	7.6
90	3 1/2	101.6	3.0	4.0	5.7	
100	4	114.3	3.0	4.0	6.0	8.6
125	5	139.8	3.4	5.0	6.6	9.5
150	6	165.2	3.4	5.0	7.1	11.0
200	8	216.3	4.0	6.5	8.2	

アルミ合金 シームレス管
長さ L4000

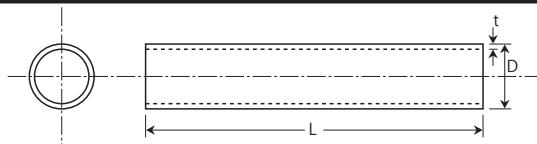

型
材

配
管
用