




# ■パンチング抜型 参考図表




順型




飛型

## 丸孔


千鳥抜(60°千鳥)が標準です。その他、角千鳥(45°千鳥)及び並列(直列90°)があります。

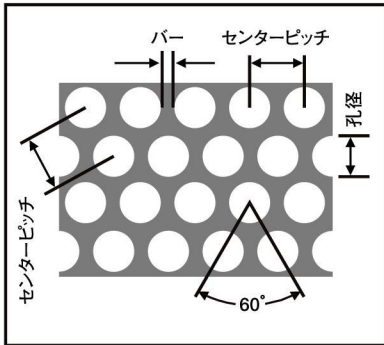

丸孔60°千鳥

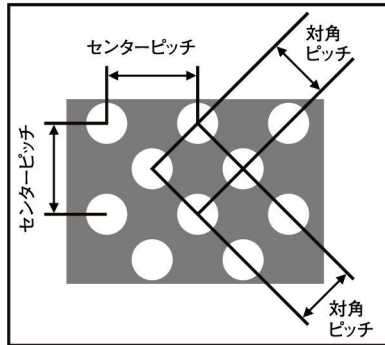


丸孔角千鳥(45°)

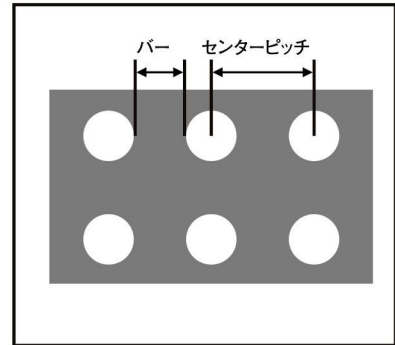


丸孔直列(90°)


**1** 0.5φ×1P  
開孔率(約23%)




**2** 1φ×2P  
開孔率(約23%)




**3** 1.5φ×3P  
開孔率(約23%)



**4** 2φ×3.5P  
開孔率(約30%)




**5** 3φ×4P  
開孔率(約51%)



**6** 3φ×5P  
開孔率(約33%)



**7** 3φ×6P  
開孔率(約23%)



**8** 4φ×6P  
開孔率(約40%)

